



**2019/2020
CATALOGUE**





THERE'S NO GLORY IN GETTING BEAT UP ON THE JOB

Aches and pains aren't trophies – they're just barriers keeping pros like you from getting the work done. You know better than anyone that this business can be back-breaking, but that's all the more reason to partner with someone who has your back.

We're about helping you finish strong and feel good doing it. That's why we've built our equipment for unmatched comfort, durability and quality of cut. And we build you up with world-class customer support.

So you can get more jobs done, with more peace of mind, and have more energy to take on tomorrow.

Let the others keep suffering for the job.

It's time for you to finish one more day of hard work feeling good.



CONTENTS

WHY FERRIS®	05
IS® SERIES ZERO-TURN	09
S SERIES ZERO-TURN	17
COLLECTION SYSTEMS	20
ACCESSORIES & ATTACHMENTS	22
SPECIFICATIONS	24
WARRANTIES	27



WORK HARD. FEEL GOOD.

*"I love my Ferris, it's very quick
and provides a great cut. I'd
recommend a Ferris to any-
body"*



MARK WAUGH



FERRIS KEEPS YOU GOING STRONG

You can count on us to be your champion – to be there every minute of every day with machines built to keep you going strong.

We're committed to doing whatever it takes to help you win – providing suspension technology, the iCD™ cutting system, and the Vanguard® Oil Guard™ System.

We help you work faster and build your bottom line, making us partners in what truly matters.




SUSPENSION TECHNOLOGY

NO PAIN. MORE GAIN. Why decide between getting your work done faster or feeling good when you finish? Ferris covers you on both. Our suspension technology reduces the effects of uneven terrain, virtually eliminating shock to the chassis, and your body. And by allowing you to maintain speed while mowing, it increases your productivity by getting the job done faster. This lets you power through each day, knowing that we'll keep you feeling good for tomorrow.

▶ **SO HOW DOES IT WORK?**

The Ferris suspension system is engineered to provide you with a smooth ride on uneven turf. The cutting deck of the mower works in conjunction with the suspension system to provide a consistent quality of cut. This system minimizes shock to the chassis, resulting in superior comfort, stability, traction and increased mowing efficiency.

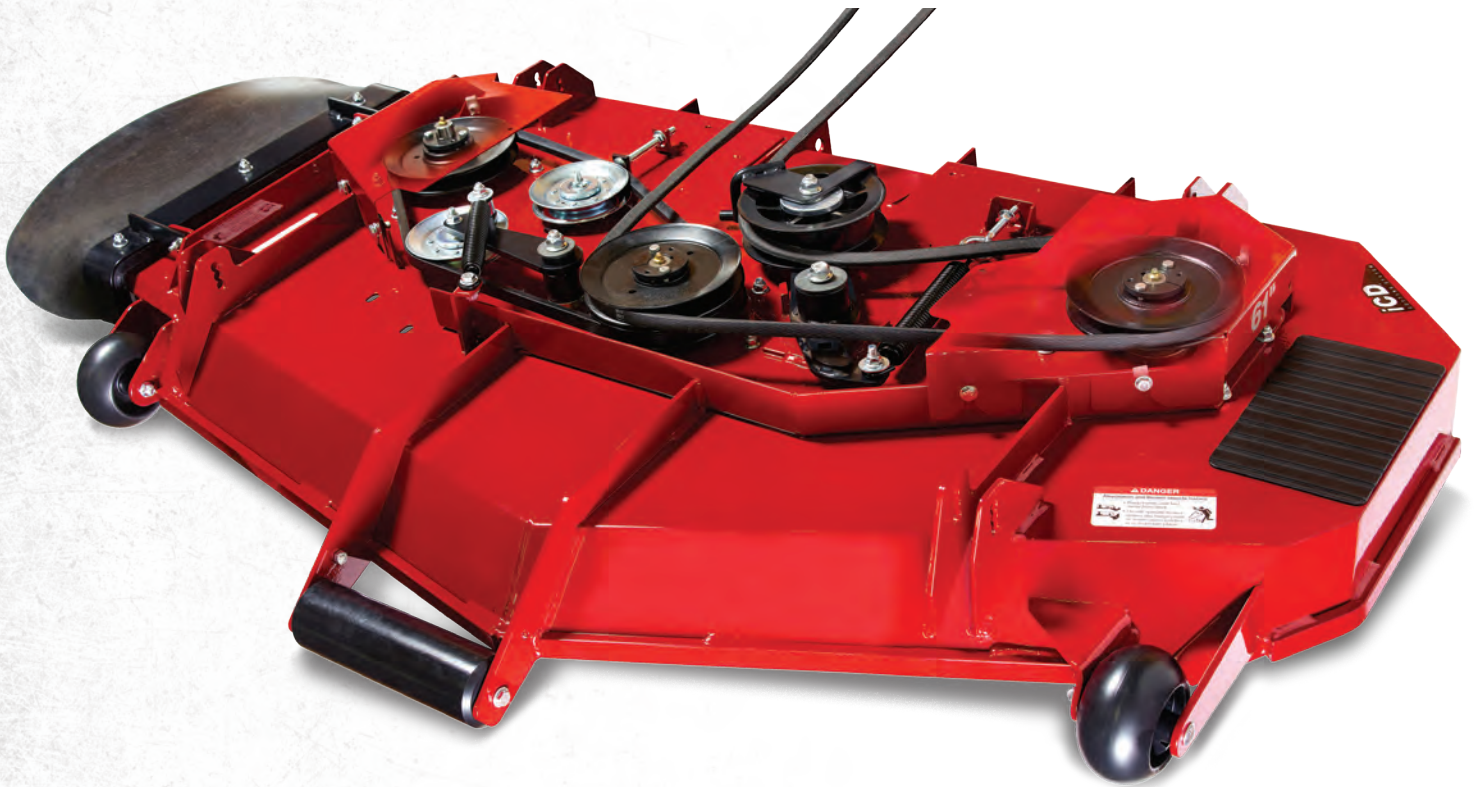

iCD CUTTING SYSTEM

STAY A CUT ABOVE. Our exclusive iCD Cutting System offers next-level performance in a variety of conditions. We built in an extra wide opening to disperse clippings quickly and evenly. Our sloped nose design allows you to cut at higher speeds without sacrificing quality of cut. Your name rides on results – that's why we give you a cut that's second to none.

▶ **iCD CUTTING SYSTEM FEATURES**

Extra wide discharge opening evenly disperses grass clippings and the rubber flexible discharge chute reduces contact damage.

Two layers of 10 gauge steel are welded together to reinforce the top center portion of the cutter deck. A reinforced leading edge protects where the deck needs it most.

Offset center point optimizes airflow and provides a larger discharge opening, allowing for mowing at higher speeds.

▶ **2-BELT DECK EXCLUSIVES** (Select Units)

Belt guide

Steel arms help prevent the belt from dislodging from the serviceable cast-iron backside idler with dust shield.

Deep grooved spindle drive pulleys

Deep grooves in the pulley provide for smoother engagement that's less likely for a belt to dislodge or roll from the pulley.

Heavy-duty custom V-belt

Engineered for superior resistance to stretching and premature wear with a profile that transmits more power than classical V-belt profiles.

3-Year Belt Limited Warranty*

* 2-belt decks come with a limited warranty of three years (36 months) or 300 hours, whichever comes first. The warranty covers parts & labor in year one and parts only in years two and three. See operators manual or dealer for complete warranty details.

OIL GUARD SYSTEM

BY VANGUARD®

LESS MAINTENANCE. MORE PERFORMANCE.

You have enough going on each day. That's why we created a technology designed to keep you going. Our first-of-its-kind Oil Guard System from Vanguard® extends maintenance intervals up to 500%. That means you spend less on oil and can cut up to 500 hours before ever needing an oil change. Get more time on the job, more money in your pocket and more mileage from your mower.




▶ WHY IT'S BETTER

- 1** Easy fill cap and integrated oil filter make tool-free oil changes easier, cleaner and faster.
- 2** High-capacity external oil reservoir keeps the oil and engine cooler.
- 3** Unique, dry sump system ensures off-angle lubrication and minimizes thermal breakdown of oil.

Save 60% on oil maintenance per season per unit*

* Available on selected models.

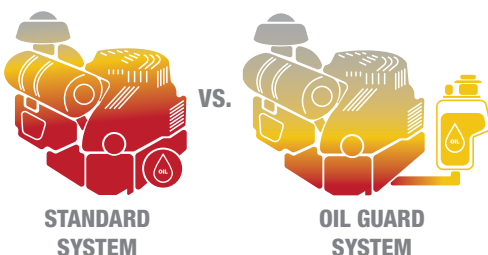

STANDARD SYSTEM

OIL GUARD SYSTEM

* Cost savings based on standard oil maintenance with 100 hour interval versus Oil Guard system 500 hour service interval.

“The comfort in the Ferris is top notch - the independent suspension means you don't feel the bumps”



MARK WAUGH





▶ **INDEPENDENT SUSPENSION**

Ferris suspension technology enables you to mow uneven terrain faster with a consistent, quality cut – allowing you to cut more grass for increased productivity.

▶ **OIL GUARD SYSTEM BY VANGUARD**

Increase oil change intervals from 100 hours to 500 hours.
Available on IS 3200 & IS 2100 with Vanguard BIG BLOCK™ engines.

▶ **iCD CUTTING SYSTEM**

Every component works together to achieve superior cut quality at higher speeds. Select models offer a 2-belt deck, engineered to extend belt life and reduce down time.

iCD Cutting system and 2-belt deck available on select models.

IS[®] SERIES

There's no need to get beat up on the job. The Ferris IS Series commercial mowers feature a suspension system that allows each wheel to follow the terrain. This not only reduces the shock to the chassis, but also on your body – allowing you to finish the day feeling good. With six Oil Guard equipped mowers and multiple deck and engine options, there is a unique solution for fleets and owner-operators.



IS[®] 5100
▶ 61"

IS[®] 2600
▶ 61"

IS[®] 3200 MIDNIGHT
▶ 61"

IS[®] 3200
▶ 61" / 72"

IS[®] 2100
▶ 52" / 61"

ISX[™] 800
▶ 52"

IS[®] 700
▶ 52"

IS[®] 600
▶ 44" / 48" / 52"

2+2 YEAR LIMITED WARRANTY* + 5-YEAR LIMITED SUSPENSION WARRANTY* + 3-YEAR LIMITED BELT WARRANTY* (IS 3200, IS 2100, ISX 800 twin belt deck units)

* See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

IS 5100

The IS5100 delivers ultimate productivity. With a heavy duty 33.5HP Caterpillar® Diesel engine and massive transmissions, it will conquer the most demanding jobs. While our IS suspension system allows for faster ground speeds and increased operator comfort.



1 iCD Cutting System

Engineered for the best quality cut and longer life

2 Foot-operated hydraulic deck lift

Hydraulic assist makes adjusting the cutter height effortless 1/4" increments from 1.5" to 6"

3 Hercules™ II spindles

Greaseable bearings and heavy-duty cast-iron construction provide a longer usable life

4 Independent suspension system

Heavy duty dual shocks to rear wheels keeps the wheels in contact with the ground for faster mowing and consistent cut

5 Hydro-Gear pumps and wheel motors

Heavy duty performance and reliability

6 26" turf-friendly rear tyres

Large rear tyres provide increased traction and performance

7 Ground speeds up to 19 kph

Cover more grass in less time for increased productivity

8 Fuel capacity of 56.8 litres of diesel

Rugged twin 29.4 litre fuel tanks

Available accessories:

Mulch Kit, trailer hitch kit, Flat-free castor tyres, headlight kit, deluxe high back suspension seat

MODEL	ENGINE OPTIONS	DECK
5900979	Caterpillar® Diesel (33.5 hp/1500cc)	61" iCD SD
5900507	Caterpillar® Diesel (33.5 hp/1500cc)	61" RD 72" SD/RD

^ Power rated by engine manufacturer.

IS 2600

The IS 2600 offers diesel power with premium features that perform well under the rigors of professional landscaping.



1 iCD Cutting System

Engineered for the best quality cut and longer life

2 Foot-operated deck lift

An adjustable pedal changes cut height in 1/4" increments from 1.75" to 5"

3 Cast-iron spindles

Greaseable bearings for a longer usable life

4 Independent suspension system

Keeps the wheels in contact with the ground for faster mowing and consistent cut

5 Hydro-Gear ZT-4400™ transaxles

Dual-commercial transaxles with 8.3" cooling fans to repel debris

6 24" turf-friendly rear tyres

Large rear tyres provide increased traction and performance

7 Ground Speeds up to 16 kph

Cover more grass in less time for increased productivity

8 Fuel capacity of 42 litres of diesel

Rugged twin 21 litre fuel tanks

Available accessories:

Mulch kit, trailer hitch kit, flat-free caster tyres, LED light kit, deluxe high-back suspension seat, service jack

MODEL	ENGINE OPTIONS	DECK
5901722	Yanmar™ Diesel (24 hp/904cc)	61" iCD

^ Power rated by engine manufacturer.

IS 3200 MIDNIGHT

The IS 3200 Midnight is a special edition that takes the IS 3200 to a whole new level. With a black paint scheme, chrome wheels, high-end adjustable shocks, a rugged rear bumper, and front end guard with service jack and light kit - this unit is one-of-a-kind.



- 1 iCD Cutting System with 2-belt deck**
Engineered for the best quality cut and longer life
- 2 Foot-operated deck lift**
An adjustable pedal changes cut height in ¼" increments from 1.5" to 5"
- 3 Hercules™ II spindles**
Greaseable bearings and heavy-duty cast-iron construction provide a longer usable life
- 4 Enhanced independent suspension system**
12-position adjustable dampening, progressive rate springs
- 5 Hydro-Gear® ZT-5400 Powertrain transaxles**
Dual-commercial transaxles with 9" cooling fans to repel debris
- 6 26" turf-friendly rear tyres**
Large rear tyres feature a rugged, deep tread pattern for added traction
- 7 Ground speeds up to 19 kph**
Cover more grass in less time for increased productivity
- 8 Fuel capacity of 42 litres of unleaded fuel**
Rugged twin 21 litre fuel tanks
- 9 Front end guard**
Multi-functional with recessed jack mount and recessed LED lights

Available accessories:

Collection system (61"), mulch kit, trailer hitch kit, flat-free caster tyres

MODEL	ENGINE OPTIONS	DECK
5901832	Vanguard® BIG BLOCK™ EFI w/ Oil Guard™ System (37 hp*/993cc)	61" iCD

† SS = Suspension Seat

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

IS 3200

The IS 3200 is built to mow all day long. It is the most heavy-duty commercial mower in the Ferris line-up, offering top-of-the-line commercial components and our highest top speed.



*61" IS3200 shown with std suspension seat, optional on 72"

- 1 iCD Cutting System with 2-belt deck**
Engineered for the best quality cut and longer life
- 2 Foot-operated deck lift**
An adjustable pedal changes cut height in ¼" increments from 1.5" to 5"
- 3 Hercules™ II spindles**
Greaseable bearings and heavy-duty cast-iron construction provide a longer usable life
- 4 Independent suspension system**
Keeps the wheels in contact with the ground for faster mowing and consistent cut
- 5 Hydro-Gear ZT-5400 Powertrain transaxles**
Dual-commercial transaxles with 9" cooling fans to repel debris
- 6 26" turf-friendly rear tyres**
Large rear tyres provide increased traction and performance
- 7 Ground speeds up to 19 kph**
Cover more grass in less time for increased productivity
- 8 Fuel capacity of 42 litres of unleaded fuel**
Rugged twin 21 litre fuel tanks
- 9 Deluxe high back suspension seat with arm rests**
Adjustable lumbar support recline (61" units only)

Available accessories:

Collection systems (61"), mulch kit, trailer hitch kit, flat-free caster tyres, LED light kit, service jack, professional stripe kit, front bumper kit

MODEL	ENGINE OPTIONS	DECK
5901841	Vanguard® BIG BLOCK™ EFI w/ Oil Guard™ System (37 hp*/993cc)	61" iCD
5901573 + 5901572	Vanguard® BIG BLOCK EFI w/ Oil Guard™ System (37 hp*/993cc)	72" iCD SD
5901573 + 5901580	Vanguard® BIG BLOCK EFI w/ Oil Guard™ System (37 hp*/993cc)	72" iCD RD

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

IS 2100SS[†]

The IS 2100 is engineered with commercial components and the iCD cutting system, making it an aggressive performer for pros.



- 1 iCD Cutting System with 2-belt deck**
Engineered for the best quality cut and longer life
- 2 Foot-operated deck lift**
An adjustable pedal changes cut height in 1/4" increments from 1.5" to 5"
- 3 Cast-iron spindles**
Greaseable bearings for a longer usable life
- 4 Independent suspension system**
Keeps the wheels in contact with the ground for faster mowing and consistent cut
- 5 Hydro-Gear ZT-4400 transaxles**
Dual-commercial transaxles with 8.3" cooling fans to repel debris
- 6 24" turf-friendly rear tyres**
Large rear tyres provide increased traction and performance
- 7 Ground Speeds up to 16 kph**
Cover more grass in less time for increased productivity
- 8 Fuel capacity of 42 litres of unleaded fuel**
Rugged twin 21 litre fuel tanks
- 9 Deluxe high back suspension seat with arm rests**
Adjustable lumbar support recline

Available accessories:
Collection systems, mulch kit, trailer hitch kit, flat-free caster tyres, LED light kit, service jack

MODEL	ENGINE OPTIONS	DECK
5901839	Vanguard® 810cc EFI w/ Oil Guard™ System (28 hp*/810cc)	52" iCD
5901840	Vanguard® 810cc EFI w/ Oil Guard™ System (28 hp*/810cc)	61" iCD

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.
† SS = Suspension Seat

ISX 800

The ISX 800 features the next generation in Ferris independent suspension technology; the Forefront™ Suspension System. This unit provides a comfortable ride that lets you get more done.



- 1 iCD Cutting System with 2-belt deck**
Engineered for the best quality cut and longer life
- 2 Foot-operated deck lift**
An adjustable pedal changes cut height in 1/4" increments from 1.5" to 5"
- 3 Cast aluminium spindles**
Greaseable bearings provide a longer usable life
- 4 Forefront™ Suspension System**
Four steel control rods ensure the caster wheel remains vertical for ultimate comfort and control
- 5 Hydro-Gear ZT-3400® transaxles**
Dual-commercial transaxles with 7" cooling fans to repel debris
- 6 23" turf-friendly rear tyres**
Large rear tyres provide increased traction and performance
- 7 Ground Speeds up to 16 kph**
Cover more grass in less time for increased productivity
- 8 Fuel capacity of 21 litres of unleaded fuel**

Available accessories:
Collection systems, mulch kit, trailer hitch kit, flat-free caster tyres, LED light kit, premium mid-back suspension seat, service jack, professional stripe kit

MODEL	ENGINE OPTIONS	DECK
5901835	Briggs & Stratton® Commercial Series (27 hp*/810cc)	52" iCD

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

IS 700

The IS 700 provides commercial components at an amazing value for landscapers and large property owners.



1 iCD Cutting System

Engineered for the best quality cut and longer life

2 Foot-operated deck lift

An adjustable pedal changes cut height in ¼" increments from 1.5" to 5"

3 Cast aluminium spindles

Greaseable bearings provide a longer usable life

4 Suspension system

Pivoting front axle allows the wheels to follow the ground for faster mowing speeds with a consistent cut quality

5 Hydro-Gear ZT-3200® transaxles

Dual-commercial transaxles with 7" cooling fans to repel debris

6 22" turf-friendly rear tyres

Large rear tyres provide increased traction and performance

7 Ground Speeds up to 16 kph

Cover more grass in less time for increased productivity

8 Fuel capacity of 21 litres of unleaded fuel

Available accessories:

Collection systems, mulch kit, trailer hitch kit, flat-free caster tyres, LED light kit, premium mid-back suspension seat, service jack, professional stripe kit

IS 600

The IS 600 provides the best value in a compact zero-turn mower, along with maneuverability and productivity.



1 Fabricated 10-gauge steel deck

Double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge

2 Foot-operated deck lift

An adjustable pedal changes cut height in ¼" increments from 1.5" to 4.5"

3 Cast aluminium spindles

Greaseable bearings provide a longer usable life

4 Suspension system

Pivoting front axle allows the wheels to follow the ground for faster mowing speeds with a consistent cut quality

5 Hydro-Gear ZT-3200® transaxles

Dual-commercial transaxles with 7" cooling fans to repel debris

6 Large, turf-friendly rear tyres

22" rear tyres (48", 52" decks) or 20" rear tyres (44")

7 Ground Speeds up to 16 kph

Cover more grass in less time for increased productivity

8 Fuel capacity of 21 litres of unleaded fuel

Available accessories:

Collection systems, mulch kit, trailer hitch kit, flat-free caster tyres, light kit, service jack, professional stripe kit, folding ROPS

MODEL	ENGINE OPTIONS	DECK
5901838	Briggs & Stratton® Commercial Series (27 hp*/724cc)	52" iCD

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

MODEL	ENGINE OPTIONS	DECK
5901730	Briggs & Stratton® Commercial Series (25 hp*/724cc)	44"
5901731	Briggs & Stratton® Commercial Series (25 hp*/724cc)	48"
5901732	Briggs & Stratton® Commercial Series (25 hp*/724cc)	52"

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.






ZERO-TURN




3-IN-1 MOWER DECKS

No stress of choice! One deck hosting every option you would need.

▶ 3-IN-1 DECK IN SIDE DISCHARGE MODE

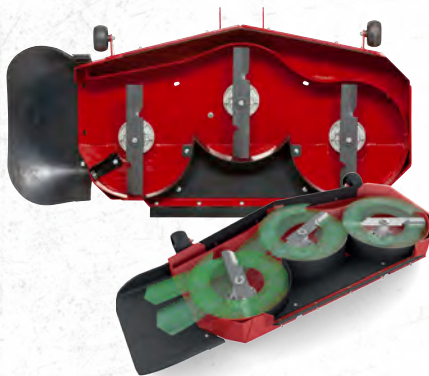

▶ 3-IN-1 DECK IN REAR DISCHARGE MODE

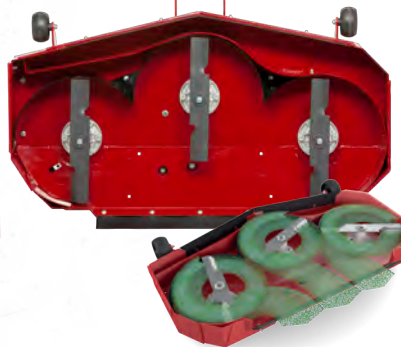

▶ 3-IN-1 DECK IN MULCHING MODE





400S



400S ▶ 48" / 48" 3-IN-1

400S SERIES

We made the S Series for those who need their mower to take on a little bit of everything. This zero-turn workhorse has industry-leading suspension technology, serving up cut quality, comfort and durability for professionals and homeowners alike. We built it to be more affordable, so more operators can experience a superior cut.

▶ POWER

Briggs & Stratton® Commercial Series

▶ SMOOTHER RIDE

A large, independent coil over shock rear suspension keeps the mower steady, so you can stay comfortable while mowing all day.

▶ CUTTING OPTIONS

Choose between traditional Side Discharge or versatile 3-in-1 Rear Discharge, Side Discharge and Mulching Decks for the flexibility to handle a wide range of conditions with ease.

- 1 Fabricated 10-gauge steel deck**
Double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge
- 2 Foot-operated deck lift**
An adjustable pedal changes cut height in ¼" increments from 1.5" to 4.5"
- 3 Cast aluminium spindles**
Greaseable bearings provide a longer usable life
- 4 Suspension system**
Front and rear adjustable shocks allow the wheels to follow the ground for faster mowing speeds with a consistent cut quality
- 5 Hydro-Gear ZT 3100® transaxles**
Dual-commercial transaxles with 7" cooling fans to repel debris
- 6 20" turf-friendly rear tyres**
- 7 Ground speeds up to 12.87 kph**
Cover more grass in less time for increased productivity
- 8 Fuel capacity of 20.8 litres of unleaded fuel**

Available accessories:

Collection systems, mulch kit, trailer hitch kit, LED light kit, service jack

MODEL	ENGINE OPTIONS	DECK
5901740	Briggs & Stratton® Commercial Series (23 hp*/724cc)	48"
5901676	Briggs & Stratton® Commercial Series (23 hp*/724cc)	


* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

3 YEAR LIMITED WARRANTY†

† See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

ZERO-TURN



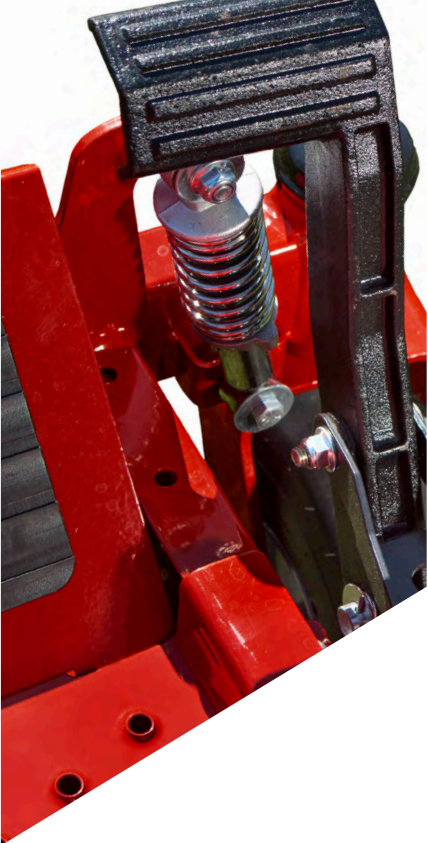

S65



S65 ▶ 42" / 52"

S65 SERIES

With fully welded frames, fabricated mower decks, thick walled front axles, and serviceable transmissions, the S 65 Series boasts commercially inspired features for years of comfort and reliability.

▶ POWER

Briggs & Stratton® Commercial Series

▶ SMOOTHER RIDE

Front coil-over suspension on 42" and front and rear suspension on 52" model keeps you comfortable and in control.

▶ CUTTING OPTIONS

Choose between a 42" or 52" cutting width for the flexibility to handle a wide range of conditions with ease.

- 1 10 Gauge deck on 52" model / 12 Gauge deck on 42" model**
Double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge
- 2 Foot-operated deck lift**
An adjustable pedal changes cut height in ¼" increments from 1.5" to 4.5"
- 3 Cast aluminium spindles**
With grease points for longer life
- 4 Suspension system**
Adjustable shocks allow the wheels to follow the ground for faster mowing speeds with a consistent cut quality
- 5 Hydro-Gear ZT 2800® transaxles**
Dual serviceable transmissions with charge pumps and 7" cooling fans to repel debris
- 6 20" turf-friendly rear tyres**
- 7 Ground speeds up to 12.87 kph**
Cover more grass in less time for increased productivity
- 8 Fuel capacity of 11.4 litres of unleaded fuel**

Available accessories:
Collection systems, mulch kit

MODEL	ENGINE OPTIONS	DECK
2691384	Briggs & Stratton® Commercial Series (25 hp*/724cc)	42"
2691386	Briggs & Stratton® Commercial Series (25 hp*/724cc)	52"

* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

3 YEARS LIMITED WARRANTY¹ OR 565 HOURS, WHICHEVER COMES FIRST

¹ See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

COLLECTION SYSTEMS

TURBO-PRO™

The TURBO-Pro System is a lightweight blower assembly ideal for use with compact models in all cutting conditions throughout the entire season.



Generous 6" diameter outlet hose

TURBO-PRO™ MAX

This go-to system for landscapers acts as a lawn vacuum for a clean finish. It quickly mounts to the deck with tool-less stainless steel hardware. It is ideal for use in all conditions found throughout the season.



Extra wide 7" diameter outlet hose

Twice the airflow vs. TURBO-Pro for increased capacity on larger decks cutting at higher speeds

FAST-VAC®

The rugged impeller utilizes industrial-grade bearings, generating phenomenal airflow for use in heavy and wet cutting conditions. Its spindle-driven vertical turbo is narrower, allowing you to get in and out of tight places.



Extra wide 7" diameter outlet hose



Durable composite impeller housing with reinforced metal plate for high contact debris areas

Heavy-duty oversized drive and idler pulleys combined with long drive belt allow for cool running and maximum belt life



Rugged steel impeller housing designed for extended life

Heavy-duty oversized drive and idler pulleys combined with a long drive belt allow for cool running and maximum belt life



Super rugged impeller rides on industrial-grade bearings to generate a phenomenal airflow



Curved steel blade impeller reduces noise
After initial installation, the **quick attach design** can be mounted or removed with no tools in a few minutes

TURBO-Pro Blower*

Length: 788mm Height: 420mm
Width: 483mm

Approximate blower weight:
22.68kg (44"/48") / 24.04kg (52") / 24.94kg (61"), includes mounting bracket



After initial installation, the **quick attach design** can be mounted or removed with no tools in a few minutes

TURBO-Pro Max Blower*

Length: 915mm Height: 458mm
Width: 534mm

Approximate blower weight:
32.66kg (52") / 29.03kg (61"), includes mounting bracket



Commercial-grade idler and pulleys drive the vertical, spindle-driven turbo resulting in a very narrow profile for improved maneuverability

FAST-Vac Blower*

Length: 935mm Height: 514mm
Width: 386.08mm




Approximate blower weight:
32.66kg (52") / 29.03kg (61"), includes mounting bracket

* Dimensions listed are the dimensions of the blower unit and do not represent what they might actually add to the mower.

TURBO-PRO SYSTEM

		S65	400S	IS 600	IS 700	ISX 800
	2-Bag Hard Top - The double bag collection system is simple to install. Each heavy-duty mesh bag has a rugged polyethylene underside with integrated handle to assist with removal.	42"/48"/52" 226L	48" 226L	44"/48"/52" 283L	52" 283L	52" 283L
	3-Bag Hard Top - Innovative molded hard top design allows for increased capacity. Simple to install. Each heavy-duty mesh bag has an integrated handle to assist with removal. Capacity: 15 cu. ft.					52"

TURBO-PRO MAX & FAST-VAC SYSTEMS

		IS 3200 MIDNIGHT	IS 3200	IS 2100
	3-Bag Soft Top - Simple to install. Each heavy-duty mesh bag has a rugged polyethylene underside with integrated handle to assist with removal. Capacity: 12.5 cu. ft.	61" TURBO-Pro Max	61" FAST-Vac	52"/61" FAST-Vac
	Electric DFS - (Dump From Seat) Simply flip the switch on the control panel to release the hopper right from your seat. Capacity: 12.5 cu. ft.	61" TURBO-Pro Max	61" FAST-Vac	52"/61" FAST-Vac
	EZ Dump - Simply pull up to release the hopper right from your seat. The hopper is specially lined to ensure that all material is dumped. Capacity: 12 cu. ft.			52"/61" FAST-Vac

ACCESSORIES & ATTACHMENTS



Mulch Kit
Select kits include dedicated mulching blades, baffles, hardware and instruction sheet.



Trailer Hitch Kit
Will accept a 1/2" shank ball and comes complete with hardware.



Flat-Free Caster Tyres
Run all day with no flats.



ROPS LED Light Kit
Available on IS Series



LED Light Kit
Available on 400S, IS 600



Premium Mid-Back Seat
High quality adjustable seat features red trim with adjustable armrests for added comfort. (IS 700 only)



NEW! Service Jack
Heavy duty steel bracket and jack allow for easy and convenient access to under the deck.



Front End Guard
Available on IS 3200.



Folding ROPS
180° fold over ROPS (roll-over protection structure) with retractable seat belt. (IS 600 only)



IS 3200 shown
with Service Jack

IS SERIES

S SERIES

	IS 5100	IS 2600	IS 3200 MIDNIGHT	IS 3200	IS 2100	ISX 800	IS 700	IS 600	400S	400S 3-IN-1	S65
Mulch Kit	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Standard	Optional
Trailer Hitch Kit	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Standard
Flat-Free Caster Tyres	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	N/A	N/A	Optional
LED Light Kit	Optional	Optional	Standard	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Armrests	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard 48" & 52" Models Optional 44" Models	Standard	Standard	Standard
Suspension Seat	Optional	Optional	Standard	Optional (Select SKUs)	Standard	Optional	Optional	N/A	N/A	N/A	N/A
Service Jack	N/A	Optional	Standard	Optional	Optional	Optional	Optional	Optional	Optional	Optional	N/A
Professional Stripe Kit	N/A	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	N/A
Folding ROPS	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Optional	N/A	N/A	N/A

SPECIFICATIONS

IS® SERIES

	IS® 600			IS® 700	ISX™ 800	IS® 2100 SS	
Part #:	5901730	5901731	5901732	5901838	5901835	5901839	5901840
Engine Brand	Briggs & Stratton® Commercial Series	Briggs & Stratton® Commercial Series	Briggs & Stratton® Commercial Series	Briggs & Stratton® Commercial Series	Briggs & Stratton® Commercial Series	Vanguard® 810 EFI with Oil Guard™	Vanguard® 810 EFI with Oil Guard™
Power Rating (hp)	25 *	25 *	25 *	27 *	27 *	28 *	28 *
Displacement (cc)	724	724	724	810	810	810	810
PTO	Electric			Electric	Electric	Electric	
Cylinders	2			2	2	2	
Starter	Electric			Electric	Electric	Electric	
Oil Guard™ System						Standard	
Fuel Tank Capacity (Litres)	20.8			20.8	20.8	41.6	
Mower Deck							
Cutting Width (in.)	44 (111 cm)	48 (122 cm)	52 (132 cm)	52 (132 cm)	52 (132 cm)	52 (132 cm)	61 (155 cm)
Cutting Height (in.)	1.5 - 4.5 (38 - 114 mm)			1.5 - 5 (38 - 127 mm)	1.5 - 5 (38 - 127 mm)	1.5 - 5 (38 - 127 mm)	
Spindles	Aluminium greaseable			Aluminium greaseable	Aluminium greaseable	Cast-iron greaseable	Cast-iron greaseable
Deck Construction	10-gauge fabricated			iCD™ Cutting System	iCD™ Cutting System, 2-belt	iCD™ Cutting System, 2-belt	
Suspension & Drive Train							
Suspension	Adjustable front and rear coil-over-shocks with pivoting front axle and a rear swing-arm with large adjustable coil-over-shocks			Adjustable front and rear coil-over-shocks with pivoting front axle and a rear swing-arm with large adjustable coil-over-shocks	ForeFront™ Suspension System - Front independent with four cast-iron control rods paired with medium size adjustable coil-over-shocks and a rear swing-arm with large adjustable coil-over-shocks	Independent front control arms with large adjustable coil-overshocks and a rear swing-arm with large adjustable coil-over-shocks	
Transmission	Dual commercial Hydro-Gear® ZT-3200® transaxles with 7" cooling fans			Dual, commercial Hydro-Gear ZT-3200® transaxles with 7" cooling fans	Dual, commercial Hydro-Gear ZT-3400® transaxles with 7" cooling fans	Dual, commercial Hydro-Gear® ZT-4400™ transaxles with 8.3" cooling fans	
Drive Axles (in)	1.125			1.125	1.125	1.375	
Caster Tyres (in)	11 x 4 - 5	13 x 5 - 6		13 x 5 - 6	13 x 6.5 - 6	13 x 5 - 6	13 x 6.5 - 6
Drive Tyres (in)	20 x 8 - 10	22 x 11 - 10		22 x 11 - 10	23 x 10.5 - 12	24 x 9.5 - 12	24 x 12 - 12
Speed							
Speeds-Fwd (kph)	0 - 16.1			0 - 16.1	0 - 16.1	0 - 16.1	
Speeds-Rev (kph)	0 - 8.1			0 - 8.1	0 - 8.1	0 - 8.1	
Dimensions							
Overall Length (mm)	2032			2058	2058	2096	
Overall Width (mm) Deflector Down / Up	1499 / 1194	1601 / 1296	1696 / 1436	1696 / 1436	1651 / 1448	1702 / 1448	1982 / 1563
Dry Weight (kg)	418	428	438	481	508	555	588
Operator Systems							
Seat Package	Contour seat	Mid-back seat with arm rests		Mid-back seat with arm rests	Premium Mid-back seat with arm rests	Premium high-back suspension seat with arm rests, adjustable lumbar and back recline	
ROPS	Non-foldable			180° foldable	180° foldable	180° foldable	
Instrumentation	Dual-function hour meter, fuel level gauge in tank			Dual-function hour meter, fuel level gauge in tank	Dual-function hour meter, fuel level gauge in tank	Dual-function hour meter, fuel level gauge in each tank	
Controls / Safety Group	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit/adjustable twin steering controls.			Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit/adjustable twin steering controls.	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit/adjustable twin steering controls.	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit/adjustable twin steering controls	
Parking Brake / Safety Circuit	Hand-operated internal transaxle brake			Hand-operated internal transaxle brake	Hand-operated internal transaxle brake	Hand-operated internal transaxle brake	
Warranty							
Engine	3-Year limited manufacturer's warranty †						
Balance of Machine	4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coil-over-shocks and all suspension related components are covered for 5 years (60 months) unlimited hours. Coverage on other components varies, please see operator's manual for complete details. †						

* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

► Indicates Model Upgrade/Increase

IS® 3200			IS® 3200 Midnight
5901841	5901573 + 5901572	5901573 + 5901580	5901781
Vanguard® BIG BLOCK™ EFI with Oil Guard™	Vanguard® BIG BLOCK™ EFI with Oil Guard™	Vanguard® BIG BLOCK™ EFI with Oil Guard™	Vanguard® BIG BLOCK™ EFI with Oil Guard™
37 *	37 *	37 *	37 *
993	993	993	993
Electric		Electric	
2		2	
Electric		Electric	
Standard		Standard	
41.6		41.6	

61 (155 cm)	72 SD (182.88 cm)	72 RD (182.88 cm)	61 (155 cm)
1.5 - 5 (38 - 127 mm)		1.5 - 5 (38 - 127 mm)	
Hercules™ II Cast-Iron		Hercules™ II Cast-Iron	
iCD™ Cutting System, 2-belt		iCD™ Cutting System, 2-belt	

Independent front control arms with large adjustable coil-over-shocks and a rear swing-arm with large adjustable coil-over-shocks	Independent front control arms with large adjustable HP coil-over-shocks and a rear swing-arm with large adjustable HP coil-over-shocks
Dual commercial Hydro-Gear® ZT-5400 Powertrain® transaxles with 9" cooling fans	Dual commercial Hydro-Gear® ZT-5400 Powertrain® transaxles with 9" cooling fans
1.375	1.375
13 x 6.5 - 6	13 x 6.5 - 6
26 x 12 - 12	26 x 12 - 12

0 - 19.3	0 - 19.3
0 - 8.1	0 - 8.1

2147		2210
1956 / 1690	2185 / 1880	1956 / 1690
667	717	690

Premium high-back suspension seat with arm rests, multi-position head rest, adjustable lumbar and back recline	Delluxe high back with arm rests	Delluxe high back with arm rests	Premium high-back suspension seat with arm rests, multi-position head rest, adjustable lumbar and back recline
165° foldable		165° foldable	
Dual-function hour meter, fuel level gauge in each tank		Dual-function hour meter, fuel level gauge in each tank	
Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls		Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls	
Hand-operated internal transaxle brake		Hand-operated internal transaxle brake	

3-Year limited manufacturer's warranty †	3-Year limited manufacturer's warranty †
------------------------------------------	------------------------------------------

IS® 2600	IS® 5100
5901722	5900979
Yanmar™ Diesel	Caterpillar® 3 Cylinder Liquid Cooled Diesel
24 ^	33.5 ^
904	1500
Electric	Electric
3	3
Electric	Electric
41.6	56.8

61 (155 cm)	61 (155 cm) or 72 (182.88) SD or RD
1.75 - 5 (45-129 mm)	1.5 - 6 (38 - 152 mm)
Cast-iron greaseable	Hercules™ II Cast-Iron
iCD™ Cutting System	iCD™ Cutting System

Independent front control arms with large adjustable coil-over-shocks and a rear swing-arm with large adjustable coil-over-shocks	Independent front control arms with large adjustable HP coil-over-shocks and a rear cast iron A arms with dual adjustable HP coil-over-shocks
Dual commercial Hydro-Gear® ZT-4400™ transaxles with 8.3" cooling fans	Dual Hydro-Gear® Pumps and wheel motors
1.375	1.25
13 x 6.5 - 6	13 x 6.5 - 6
24 x 12 - 12	26 x 12 - 12

0 - 16	0 - 19.3
0 - 8.1	0 - 9.6

2191	2210
1950 / 1613	196 / 161 224 / 188
729	1008

Premium high-back with arm rests	Premium high-back seat with arm rests
180° foldable	165° foldable
Dual-function hour meter, fuel level gauge in each tank	Dual-function hour meter, fuel level gauge in each tank
Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls
Hand-operated internal transaxle brake	Disc brake

2-Year limited manufacturer's warranty †	2-Year limited manufacturer's warranty †
------------------------------------------	------------------------------------------

4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coil-over-shocks and all suspension related components are covered for 5 years (60 months) unlimited hours. Coverage on other components varies, please see operator's manual for complete details. †

^ Power level as rated by engine manufacturer.

† See operator's manual or dealer for complete warranty details. Refer to engine operator's manual for engine warranty.

SPECIFICATIONS

S SERIES

	400S		S65	
Part #:	5901740	5901706	2691384	2691386
Engine Brand	Briggs & Stratton® Commercial Series		Briggs & Stratton® Commercial Series	
Power Rating (hp)	23 *	23 *	25 *	25 *
Displacement (cc)	724	724	724	724
PTO	Electric		Electric	
Cylinders	2		2	
Starter	Electric		Electric	
Fuel Tank Capacity (litres)	20.8		11.4	
MOWER DECK				
Cutting Width (in)	48 (122 cm)	48 RD (122 cm)	42 (106 cm) ▶	52 (132 cm)
Cutting Height (in)	1.5 - 4.5 (38 - 114 mm)		1.5 - 4.5 (38 - 114)	
Spindles	Aluminium greaseable		Aluminium greaseable	
Deck Construction	10-gauge fabricated	10-gauge fabricated, 3 in 1 mulch / side / rear disc	12-gauge Fabricated	10-gauge Fabricated
SUSPENSION & DRIVE TRAIN				
Suspension	Front and rear adjustable coil-over-shocks		Front coil-over shocks ▶	Front and rear adjustable coil-over shocks
Transmission	Dual Hydro-Gear® ZT-3100® transaxles with 7" cooling fans		Dual Hydro-Gear® ZT2800 Premium Transmissions with Charge Pumps	
Drive Axles (in)	1		1	
Caster Tyres (in)	11 X 4 - 5		11 X 4 - 5	
Drive Tyres (in)	20 X 10 - 10		20 x 7 - 10 / 20 x 10 - 10	
SPEED				
Speeds-Fwd (kph)	0 - 12.8		0 - 12.8	
Speeds-Rev (kph)	0 - 6.43		0 - 6.43	
DIMENSIONS				
Overall Length (mm)	1867		1867	
Overall Width (mm)	1499 / 1347		1400 / 1120 42"	
Deflector Down / Up			1650 / 1380 52"	
Dry Weight (kg)	342		342	
OPERATOR SYSTEMS				
Seat Package	Mid-back seat with arm rests		Contour, with arm rests	
Instrumentation	Dual-function hour meter, fuel level gauge in tank		Fuel level gauge, hour meter	
ROPS	N/A		N/A	
Controls / Safety Group	Adjustable twin fold out 1" tubular steering levers with comfort grip		Adjustable twin fold out 1" tubular steering levers with comfort grip	
Parking Brake / Safety Circuit	Integrated transaxle brake		Integrated transaxle brake	
WARRANTY				
Engine	2-Year Commercial		2-Year Commercial	
Balance of Machine	3-Year Limited		3-Year Limited OR 565 hours, whichever comes first	



^ Approved applicants only. Fees, terms, conditions & minimum finance amount apply, incl \$99 Annual Fee charged on the account open date and annually on the anniversary of that date. Annual Fee must be paid in full within 90 days or it will attract interest. Minimum monthly repayment required. Interest, (charged at the Expired Promotional Rate) payable on outstanding balances after any Interest Free Period. See skyecard.com.au for current interest rates. Only available at Skye retail partners. Credit provided by FlexiCards Australia Pty Ltd ABN 31 099 651 877 Australian Credit Licence number 247415. FlexiCards Australia is a subsidiary of FlexiGroup Limited.

* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

† See operator's manual or dealer for complete warranty details. Refer to engine operator's manual for engine warranty.

WARRANTIES

We equip you to get the job done, but we don't stop there. We protect your investment with our robust commercial warranties.

▶ **RIDE-ONS**

The unmatched 2+2 Year limited warranty covers all IS® Series ride-on commercial mowers for four years (48 months) or 500 hours, whichever occurs first. During the first two years (24 months), the mower is covered for unlimited hours.

Belts, tyres, brake pads, battery and blades are covered for 90 days.

The 400S & S65 Series have a limited warranty for three years (36 months) or 565 hours, whichever occurs first.

▶ **SUSPENSION**

All consumers who purchased a Ferris riding mower with suspension will have the coil-over shocks and all suspension-related components covered for 5 years (60 months), unlimited hours.

▶ **BELTS**

The 2-belt decks on the IS 3200, IS 2100 and ISX 800 come with a limited warranty of three years (36 months) or 300 hours, whichever occurs first. The warranty covers parts & labor in year one and parts only in years two and three.

The traditional single belt decks on the other mowers come with a limited warranty of one year (12 months) or 100 hours, whichever occurs first. The warranty covers parts & labor.





WORK HARD. FEEL GOOD.

FERRISMOWERS.COM.AU

- ▶ [Locate Your Dealer](#)
- ▶ [Financing Offers](#)
- ▶ [Productivity Calculator](#)
- ▶ [Technical Support](#)

Hydro-Gear® is a registered trademark of Hydro-Gear Inc. and is used under license.

Yanmar™ is a trademark of Yanmar.

Briggs & Stratton: All power levels are stated gross horsepower at 3600 rpm per SAE J1940.

Caterpillar® is a registered trademark of Caterpillar Inc.

Yanmar: Power rated by engine manufacturer

Briggs & Stratton Corporation has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice. Products may vary from images shown.



BRIGGS&STRATTON

3 Imperata Close
Kemps Creek NSW 2178
1800 356 632

Copyright ©2019. All rights reserved.